

Overview

Thank you for choosing your LTE Mobile Hotspot!


Having the Mobile Hotspot at your fingertips will allow you to access LTE network for fast uploads and downloads. You can also connect up to 15 Wi-Fi capable devices to the Internet at once - laptops, tablets, eReaders, Smartphones and more.

System Requirements

- Compatible with all IEEE802.11b/g/n/ac Wi-Fi enabled devices.
- Works with the latest versions of most browsers*.


** It is recommended to use the latest versions of Internet browsers. Outdated versions may not be compatible with the Mobile Hotspot Web Admin User Interface, <http://mobile.hotspot>*

Components

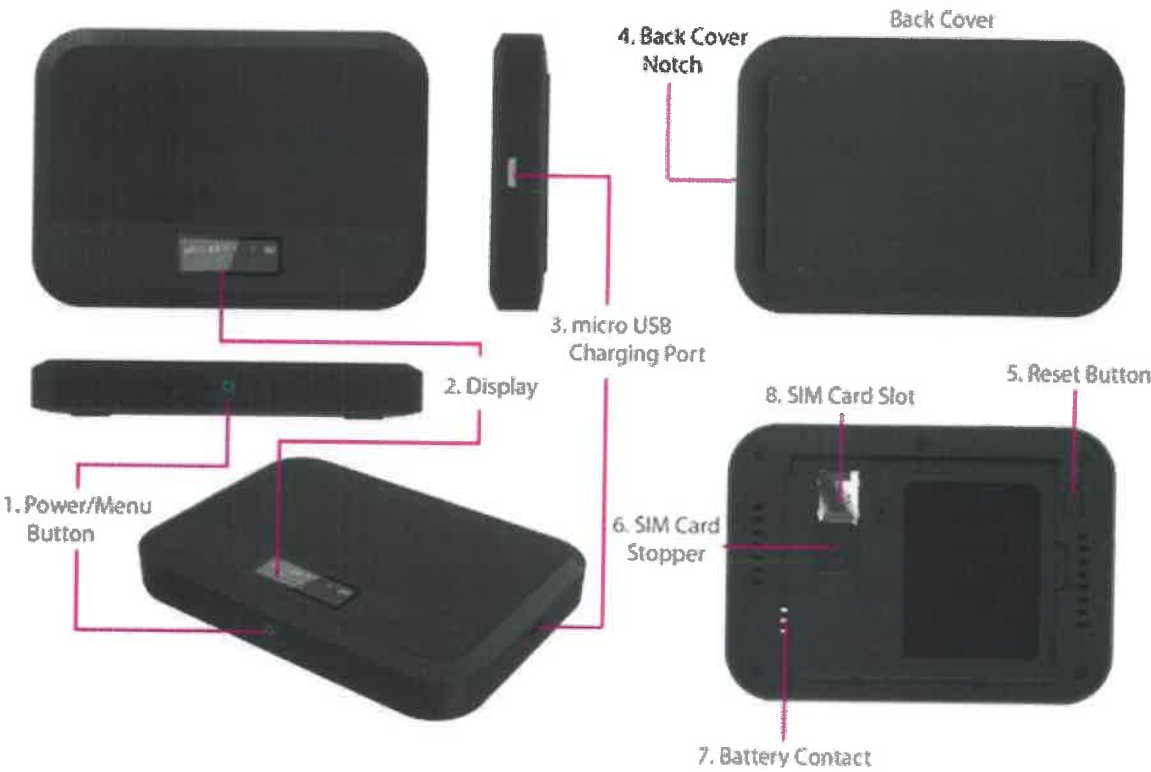




1. **Power/Menu Button** – Turn on/off Mobile Hotspot. Shows device menu and information

Button Operation

	Operations	Actions
	Turn On	Press and hold the button for 3 seconds.
	Turn Off	Press and hold the button until "Goodbye" message appears.
	Display Wake-Up	When the display is off (sleep mode), the first quick press of the button wakes up the display.
	Info Display	When the display is on, press the button quickly to go through the device menu and information.





LED Indicator

	Colors	Charging Status
	Off	Power off.
	Solid	Power off and connected to a charger.
	Blinking	Power on/Operating normally

2. **Display** – Provides device status information such as battery, service signal strength, the number of users connected with Wi-Fi etc.
3. **Charger Port** – The USB charger connects here.
4. **Back Cover Notch** – Lift the notch to open the back cover.
5. **Reset Button** – To perform reset of your device, gently press and hold the button for 3 seconds, then release.
6. **SIM Card Stopper** – Lift the stopper to insert or replace the Nano SIM card.
7. **Battery contact** – Insert the battery to align with the battery contacts.
8. **SIM Card Slot** – The SIM card installation slot.

Device Display




Icons	Description
	<p>4 level signal strength indicators. More bars indicate a stronger signal.</p>
<p>LTE 3G R</p>	<p>Networks icon appears depends on which networks connected. (LTE / 3G / Roaming)</p>
	<p>Appears when data is being transmitted between the mobile network and your hotspot.</p>
<p>Wi-Fi 1 Wi-Fi 2 Wi-Fi 3 Wi-Fi Max</p>	<p>Shows the number of connected devices. (1~14 and Max).</p>
	<p>Appears when you have unread messages.</p>
	<p>The bar inside the battery indicates the battery level. When battery power is low, the battery outline blinks.</p>

Battery Management

Your Mobile Hotspot is equipped with a replaceable and rechargeable battery. It works from its charged battery alone, or when the device is plugged into a power source.

Note: Please do not attempt to open or disassemble your hotspot and the battery pack. Doing so may cause damage that voids your warranty.

Charge the battery with the charger provided together with your hotspot. While the battery is charging, the battery charging icon  displays.

IMPORTANT! Please use only an approved charger to charge your hotspot. Improper handling of the charging port, as well as the use of an incompatible charger, may cause damage to your device and void the warranty.